



Vancouver Film Studios

Certified




Corporation

Building J houses three sound stages: Stage J1 and Stage J2 are 15,000 sq. ft each, and Stage J3 is 18,000 sq. ft. All buildings on the Vancouver Film Studios lot are equipped with 24-hour security.



STAGE J1

SQUARE FEET	15,000
DIMENSIONS	100' x 150'
HEIGHT	40'
SOUND	Acoustical insulation 16'x16' sound door Building acoustically designed with tilt up concrete walls
POWER	Directors control panels, four points 40 watts per sq. ft. 3 phase power services from two locations, each with four camlocks
AIR	Mechanical smoke exhaust fans Fresh air exchange heating
STRUCTURE	Cleats Protective roll up doors Wooden catwalk system Truss system for lights Truss load of 40 lbs/sq. ft.(average), max point load of 3,500 lbs. per truss Clearspan

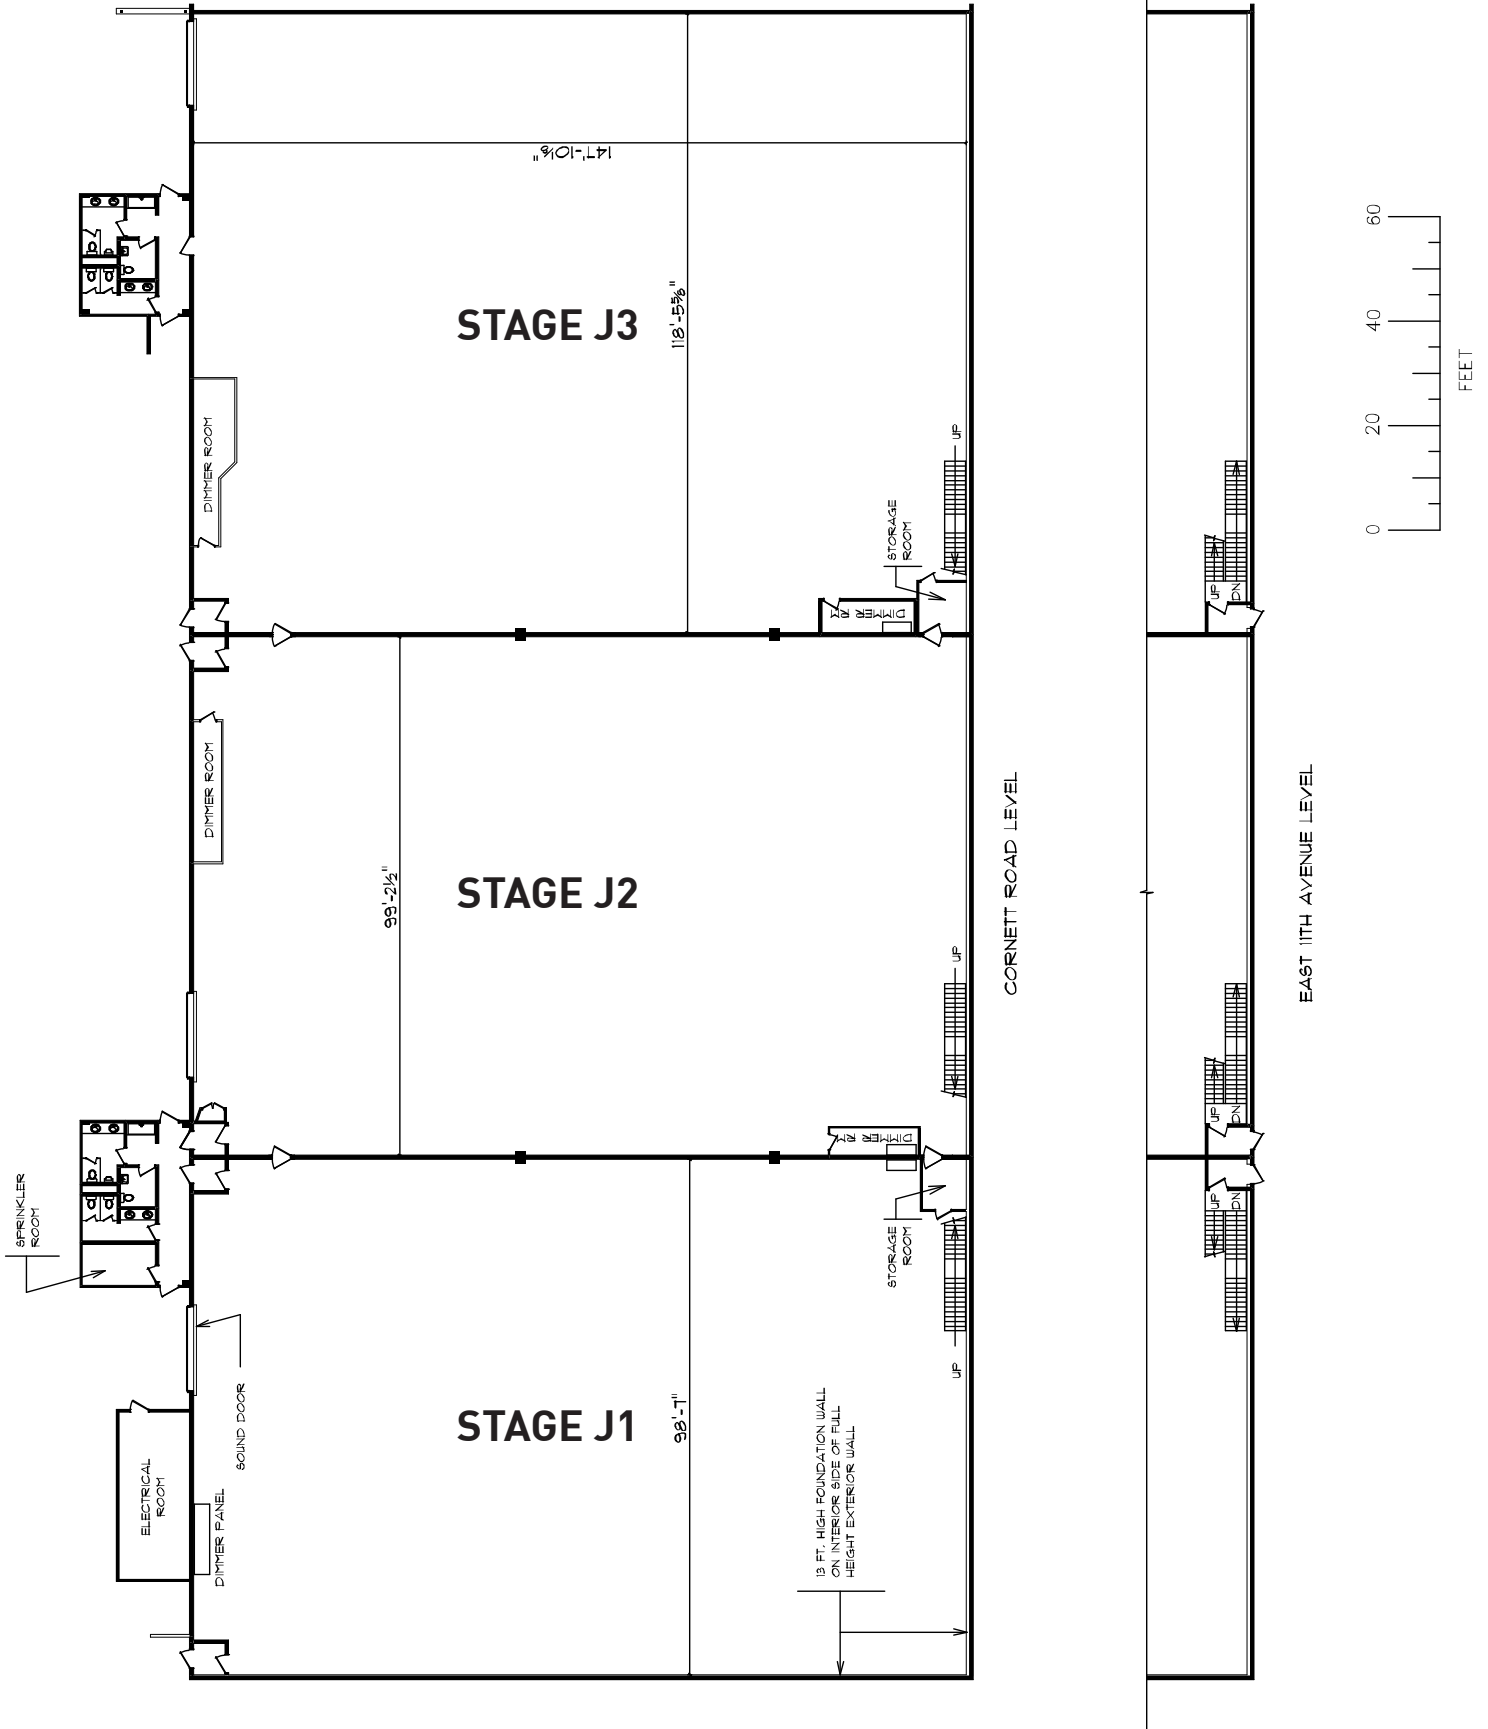



Vancouver Film Studios

Certified




Corporation

Building J houses three sound stages: Stage J1 and Stage J2 are 15,000 sq. ft each, and Stage J3 is 18,000 sq. ft. All buildings on the Vancouver Film Studios lot are equipped with 24-hour security.



STAGE J2

SQUARE FEET	15,000
DIMENSIONS	100' x 150'
HEIGHT	40'
SOUND	Acoustical insulation 16'x16' sound door Building acoustically designed with tilt up concrete walls
POWER	Directors control panels, four points 40 watts per sq. ft. 3 phase power services from two locations, each with four camlocks
AIR	Mechanical smoke exhaust fans Fresh air exchange heating
STRUCTURE	Cleats Protective roll up doors Wooden catwalk system Truss system for lights Truss load of 40 lbs/sq. ft.(average), max point load of 3,500 lbs. per truss Clearspan

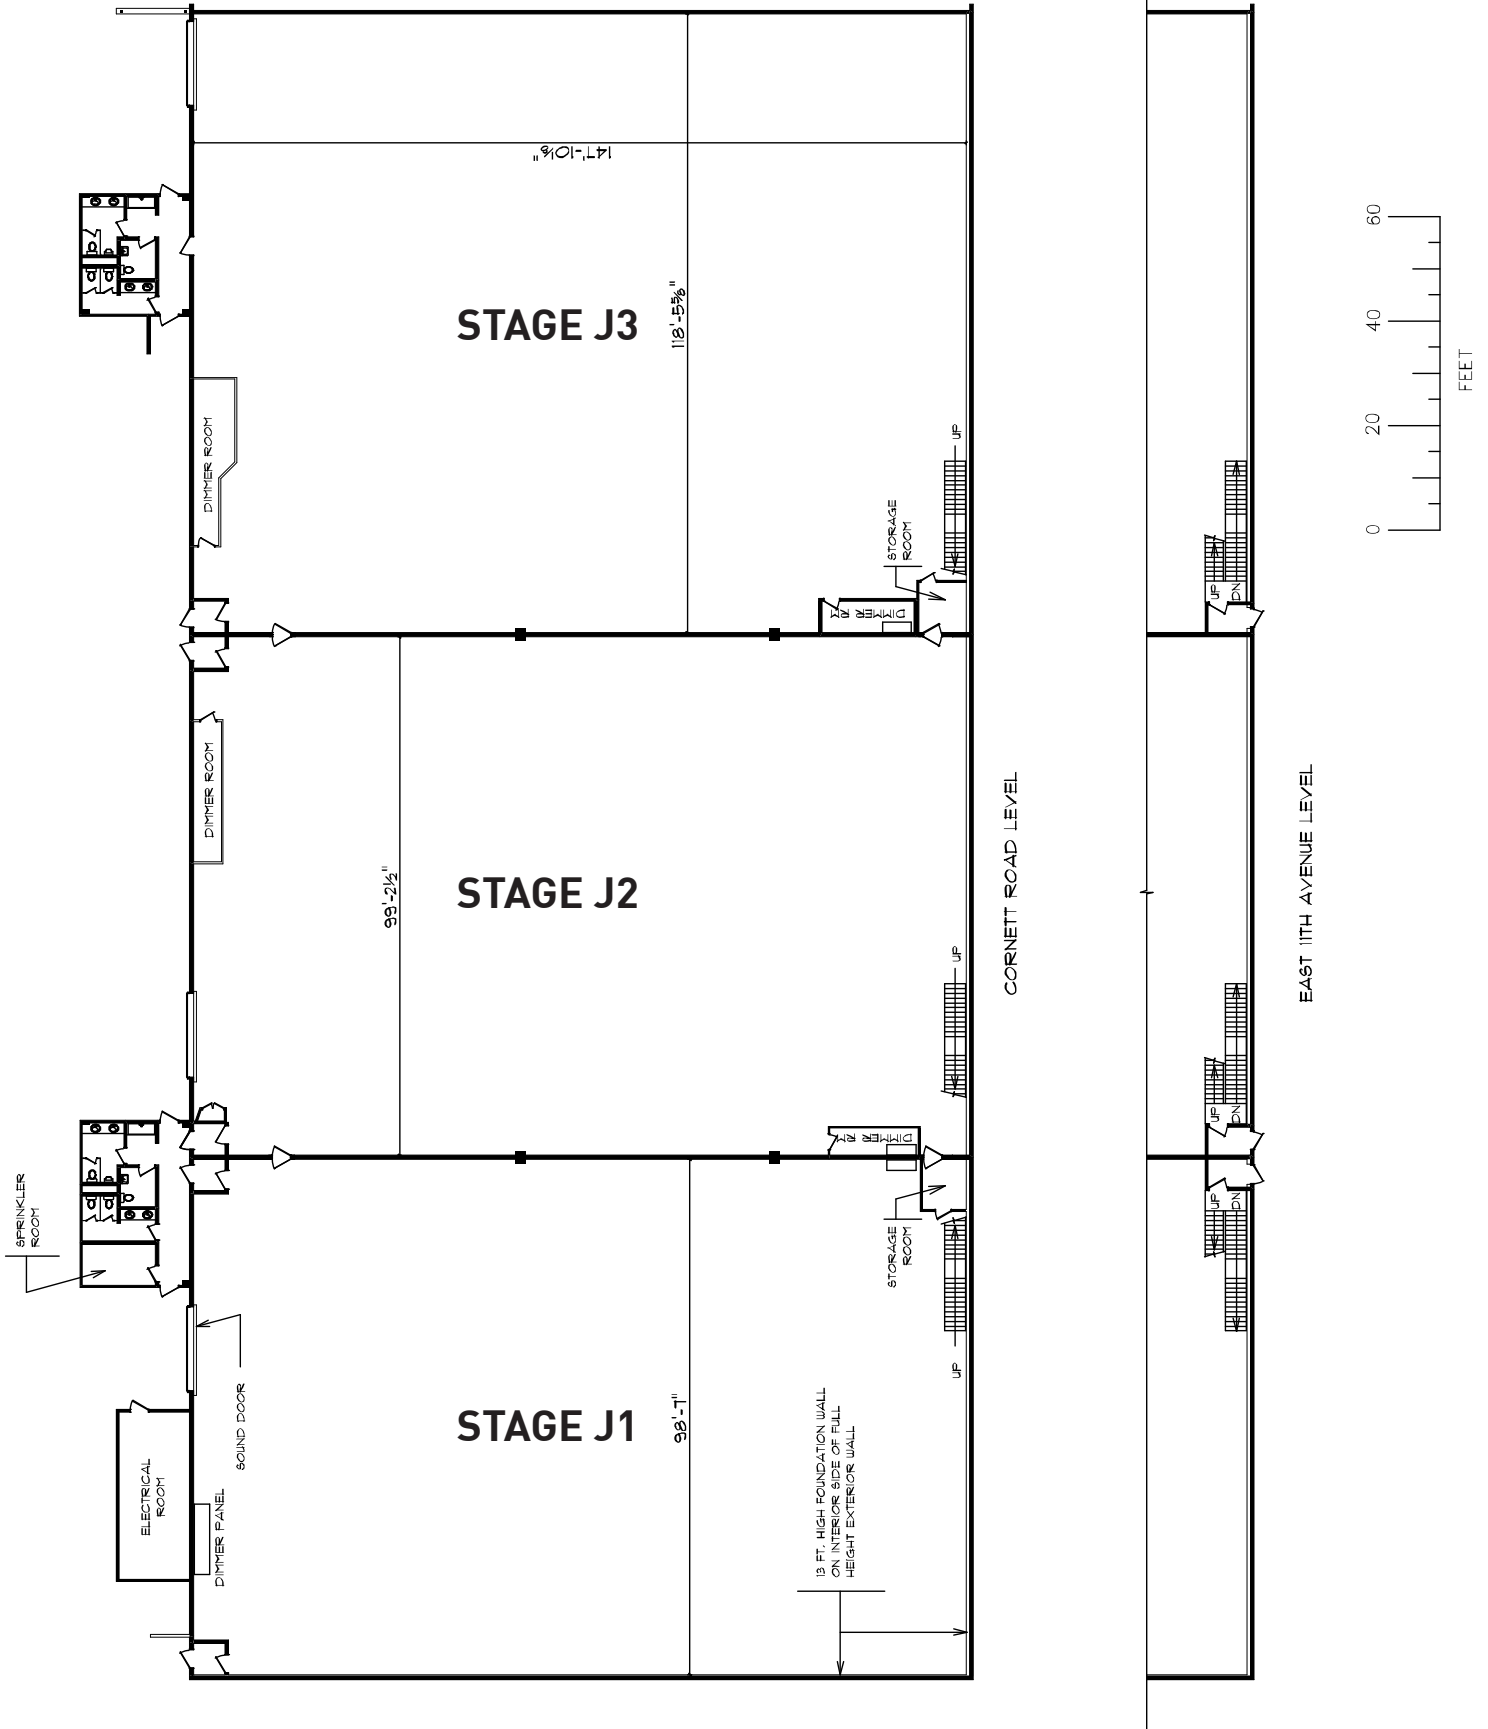



Vancouver Film Studios

Certified



Corporation

Building J houses three sound stages: Stage J1 and Stage J2 are 15,000 sq. ft each, and Stage J3 is 18,000 sq. ft. All buildings on the Vancouver Film Studios lot are equipped with 24-hour security.



STAGE J3

SQUARE FEET	18,000
DIMENSIONS	120' x 150'
HEIGHT	40'
SOUND	Acoustical insulation 16'x16' sound door Building acoustically designed with tilt up concrete walls
POWER	Directors control panels, four points 40 watts per sq. ft. 3 phase power services from two locations, each with four camlocks
AIR	Mechanical smoke exhaust fans Fresh air exchange heating
STRUCTURE	Cleats Protective roll up doors Wooden catwalk system Truss system for lights Truss load of 40 lbs/sq. ft.(average), max point load of 3,500 lbs. per truss Clearspan

